




SYMBOL CARD

description Environmentally-friendly ECF boards, certify FSC[®]. Double blade coated on one side with a Satin finish. Available in Premium White shade.

range

| size | grain | substance |
|--------|-------|-------------------------|
| 72x102 | LG | 210 240 270 300 330 360 |

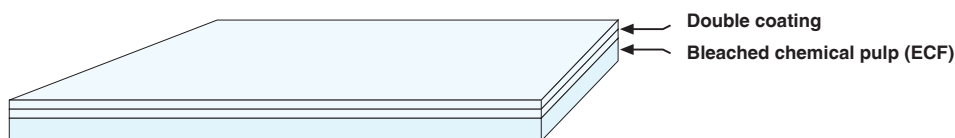

technical features
ref. standard/instrument
unit of measure

| substance | thickness | roughness* | stiffness Taber 15° | |
|------------------|-----------|------------|---------------------|-----------|
| ISO 536 | ISO 534 | ISO 8791-2 | ISO 2493 | |
| g/m ² | µm | ml/min | mN | |
| | | | long±10% | cross±10% |
| 210 ± 4% | 250 ± 10 | 350 ± 50 | 85 | 50 |
| 240 ± 5% | 285 ± 10 | 350 ± 50 | 110 | 70 |
| 270 ± 5% | 325 ± 10 | 350 ± 50 | 160 | 100 |
| 300 ± 5% | 360 ± 10 | 350 ± 50 | 200 | 125 |
| 330 ± 5% | 400 ± 15 | 350 ± 50 | 250 | 160 |
| 360 ± 5% | 437 ± 15 | 350 ± 50 | 290 | 190 |

Brightness - ISO 2470 (R457) - 104% ± 2
Relative Humidity 50% ± 5 ref. TAPPI 502-98
* Uncoated side

ecological features



The mark of responsible forestry

ELEMENTAL
CHLORINE
FREE
GUARANTEED



notes The product is completely bio-degradable and recyclable. Special runs available upon request.

The Company reserves the right to modify the technological features of the product in relation to market requirements.

Symbol Card is excellent for packaging, covers, postcards, brochures, promotional material, greeting cards and similar applications.

applications

Can be used without problems with the main printing systems: letterpress, offset, blind embossing, hot foil stamping, thermography and screen-printing. For offset printing, the characteristics of the coated side are comparable to our Symbol Freelifa Satin, and the uncoated side is designed to provide good printability, also with solid colours.

**printing
suggestions**

Good results can be expected with all the main converting process: cutting, die-cutting, scoring, glueing, varnishing and plastic lamination.

**converting
suggestions**